

m e n , i d e a s , t e c h n o l o g i e s



*checkweigher*  
**checkweigher**  
*checkweigher*

**35D3**





**checkweigher**

**35D3**

## Equipment

- Digital electronics with alphanumeric graphic display panel
- Electronic self-calibration device
- Production data management in conformity with the standards in force
- Speed adjustable from keypad
- Mobile average function
- 100 storable product programs
- RS232 serial port
- Ejection systems
- Infeed automatic sincronization system
- Protection tunnel with inspection door


## Technical specifications

Capacity	1.500 g
Output	up to 100 PPM
Display division	0,1 g ÷ 1 g
Accuracy from	± 0,1 g
Pneumatic supply	0,6 Mpa
Air consumption (for ejection)	2NI
Power supply	380V tri-phase 50/60Hz (earth + neutral)
Power consumption	700W
Version	Stainless steel IP66

## Accessories

- Feed-back function
- 24- columns panel printer
- Data collection via network
- Conformity with standards ISO-FDA-HACCP

## 35D3

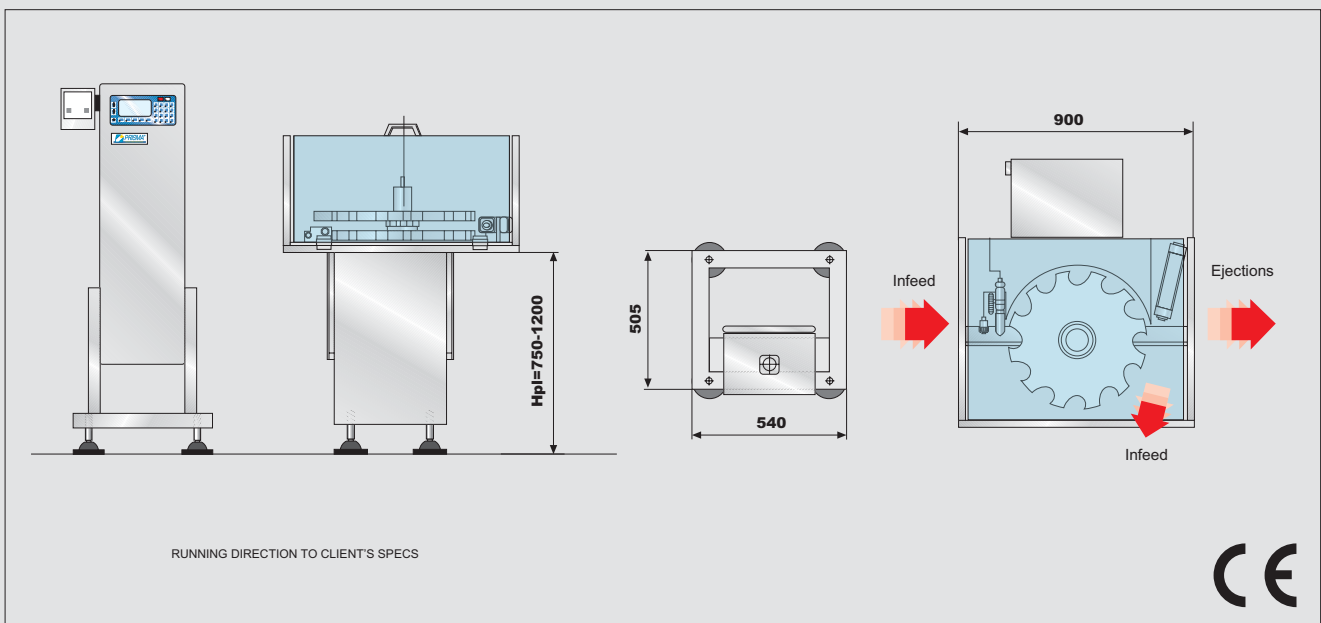

© 2002 - 2005 PRISMA INDUSTRIALE - REV 09/2005



Prisma Industriale S.r.l.

• Via La Bionda, 17 - 43036 Fidenza - Parma - Italy • Tel. +39 0524 527270 - Fax +39 0524 524142  
 • www.prismaindustriale.com • info@prismaindustriale.com

Data appearing in this brochure may be modified without prior warning.  
 The machine used in this document is with all options