

m e n , i d e a s , t e c h n o l o g i e s



metal detector
metal detector
metal detector

MDF11





metal detector

MDF11

Technical specifications

- Power supply 230V 50/60Hz single-phase
- Absorption 200W
- Version Stainless steel IP65
- Scanning capacity 10000 pcs/minute
- Inclination Adjustable
- Pneumatic supply Not requested


Accessories

- Rejects container
- FDA validation

Description MDF11

- Principle of operation: digital with bidimensional image
- N. of programs 100
- Operator panel graphic display, alphanumeric keypad
- Product image display
- RS232 serial interface
- Alphanumeric data entry
- Self-check function
- Phase adjustment function
- Automatic product compensation (tracking)
- Version

- Reject check performed sensor (optional)
- Function and process alarm output
- OK pcs. and rejects totalizer
- Report archive
- Modifiable password for access to settings
- Date/time function
- Image printing
- Total printouts
- Conformity with standards ISO-FDA-HACCP
- Stainless steel IP65

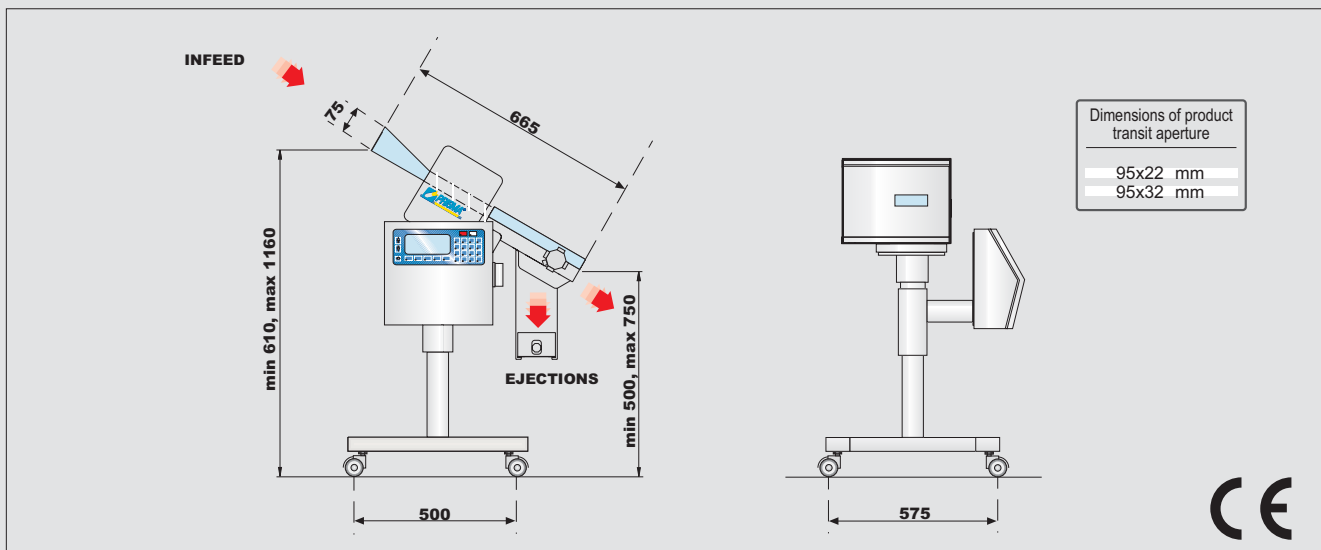

© 2002 - 2005 PRISMA INDUSTRIALE - REV 09/2005



Prisma Industriale S.r.l.

• Via La Bionda, 17 - 43036 Fidenza - Parma - Italy • Tel. +39 0524 527270 - Fax +39 0524 524142
 • www.prismaindustriale.com • info@prismaindustriale.com

Data appearing in this brochure may be modified without prior warning.
 The machine used in this document is with all options