

Your partner in inspection and quality control



checkweigher

01D3 PHARMA





checkweigher

01D3 PHARMA

Equipment

- Digital electronics with alphanumeric graphic display
- Electronic self-calibration device
- Production data management in conformity with the standards in force
- 3 levels password access protection
- Speed adjustable from keypad
- Mobile average function
- 100 storable product programs
- 2 RS232 serial ports
- Conformity with standards ISO-FDA HACCP

Accessories


- Ejection systems
- Reject management systems
- Wind-prevention tunnel
- 24-columns panel printer
- Open flap control device
- Products programs memory expansion
- USB interface
- Ethernet interface
- Feed-back function
- FAT/SAT, IQ/OQ validations

Technical Specifications


Weighing range	from 0 up to 600 g
Display division	from 0,1 g
Linear speed	up to 100 m/min
Throughput	up to 500 ppm
Accuracy*	from $\pm 0,1$ g
Pneumatic supply	0,6 Mpa
Air consumption (for ejection)	1 NI
Power supply	230V 50/60Hz single-phase
Power consumption	700 W
Mirror finishing of metal parts	Stainless steel IP55 - IP65

01D3 Pharma

*depending on the weight, dimensions and type of product

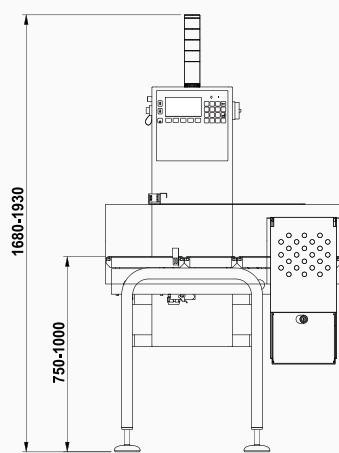

RUNNING DIRECTION TO CLIENT'S SPECS

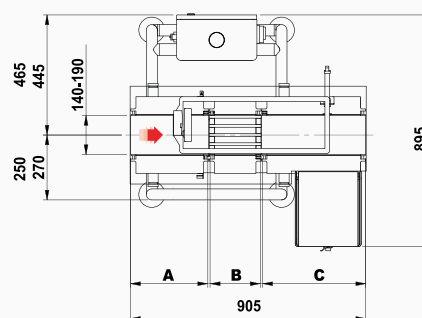

Plates configuration		
Infeed A	Weighing B	Outfeed C
200	300	400
300	200	400

